

Combination arrester V50, 3-pole + NPE 280 V



Lightning current combination arrester, type 1+2




- For lightning current equipotential bonding to VDE 0185-305 (IEC 62305)
- Lightning current arresting capacity of 12.5 kA (10/350) per pole and up to 50 kA (10/350) in total
- Modular, plug-in arrester with cut-off unit and visual status display
- Locking mechanism with vibration protection and voltage keying
- Plastic to UL 94 V-0
- The remote signalling (FS) variants have a potential-free changeover contact for remote signalling


Application: Lightning current equipotential bonding for buildings of class III and IV.

Type	Highest continuous voltage AC V	Pole version	Protection rating	Pack. pcs	Weight kg/100 pcs.	Item No.
V50-3+NPE-280	280	3+N/PE	IP20	1	58,800	5093526

Dimensions

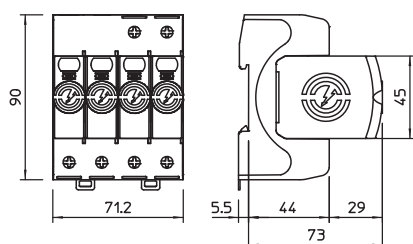

Connection options



V50-3+NPE-280

SPD to EN 61643-11	Type 1+2
SPD to IEC 61643-11	Class I+II
SPD to UL 1449	Type 4
Nominal voltage AC (50 / 60 Hz) V	U _n 230
Maximum continuous voltage AC V	U _c 280
Nominal discharge current (8/20 μs) kA	I _n / L-N 30
Maximum discharge current (8/20 μs) kA	I _{max} 50
Lightning surge current (10/350 μs) kA	I _{imp} 12,5
Total discharge current (10/350) kA	I _{total} 50
Arrester surge current (8/20 μs) [total] kA	I _{total} 80
Protection level [L-N] kV	U _p 1,3
Combined voltage protection level [L-PE] kV	U _p / L-PE 2,5
Residual voltage [L-N] @ 1 kA kV	U _{res} 0,7
Residual voltage [L-N] @ 5 kA kV	U _{res} 0,8
Max. mains-side overcurrent protection	160 A gL/gG
Short-circuit withstand for max. mains-side overcurrent protection	50 kA eff
Operating temperature range °C	T _u -40-+80
Protection rating	IP20
Approvals	ÖVE
Cable cross-section, flexible (fine-wire) mm²	1,5-35
Rigid cable cross-section (single wire/multiwire) mm²	1,5-35
Cable cross-section, flexible (fine-wire) AWG	16-2
Rigid cable cross-section (single wire/multiwire) AWG	16-2