



Base module;for vertical mounting on both sides

Part no. **SL4-PIB-D**  
 Catalog No. **171304**  
 Alternate Catalog No. **SL4-PIB-D**  
 EL-Nummer **4137540**  
 (Norway)

## Delivery program

|                            |  |  |                                                                                    |
|----------------------------|--|--|------------------------------------------------------------------------------------|
| Product range              |  |  | SL signal towers                                                                   |
| Basic function             |  |  | Base module                                                                        |
| Connection technique       |  |  | Push in terminals                                                                  |
| Mounting type              |  |  | for vertical mounting on both sides                                                |
| Fitted with                |  |  | Base with external fixing holes including cover                                    |
| Number of modules          |  |  | max. 2 x 5 modules                                                                 |
| Colour                     |  |  | black                                                                              |
|                            |  |  |  |
| For use with               |  |  | SL4-L-...<br>SL4-BL-...<br>SL4-FL-...<br>SL4-AP-...                                |
| Connection to SmartWire-DT |  |  | no                                                                                 |

## Technical data

### General

|                                           |  |                 |                                                                           |
|-------------------------------------------|--|-----------------|---------------------------------------------------------------------------|
| Standards                                 |  |                 | IEC/EN 60947-5-1                                                          |
| Climatic proofing                         |  |                 | Damp heat, cyclic, to IEC 60068-2-30                                      |
| Mounting position                         |  |                 | As required                                                               |
| Mechanical shock resistance               |  | g               | > 15<br>according to IEC 60068-2-27<br>Shock duration 11 ms<br>Sinusoidal |
| IEC degree of protection                  |  |                 | IP66<br>IEC/EN 60529                                                      |
| Protection type UL                        |  |                 | Type 4, 4X, 13                                                            |
| Cap colour                                |  |                 | black                                                                     |
| Ambient temperature                       |  | °C              | -30 - +60                                                                 |
| Number of signal elements                 |  |                 | Max. 5 with standard base<br>Max. 10 with base for mounting on both sides |
| Terminal capacity                         |  |                 |                                                                           |
| Solid or flexible conductor               |  | mm <sup>2</sup> | 0.2 - 1.5                                                                 |
| Solid or flexible conductor, with ferrule |  | mm <sup>2</sup> | 0,25 - 1,5                                                                |
| Flexible with ferrule with plastic collar |  | mm <sup>2</sup> | 0.25 - 0.75                                                               |
|                                           |  |                 | AWG 24 - AWG 16                                                           |

### Contacts

|                                       |                  |      |       |
|---------------------------------------|------------------|------|-------|
| Rated impulse withstand voltage       | U <sub>imp</sub> | V AC | 4000  |
| Rated insulation voltage              | U <sub>i</sub>   | V    | 250   |
| Overvoltage category/pollution degree |                  |      | III/3 |

### modules

|               |  |  |                                                                 |
|---------------|--|--|-----------------------------------------------------------------|
| Voltage range |  |  | 24 V AC/DC ± 10 %<br>110/120 V AC ± 10 %<br>230/240 V AC ± 10 % |
|---------------|--|--|-----------------------------------------------------------------|

Design verification as per IEC/EN 61439

|                                        |  |    |     |
|----------------------------------------|--|----|-----|
| Technical data for design verification |  |    |     |
| Operating ambient temperature min.     |  | °C | -30 |
| Operating ambient temperature max.     |  | °C | 60  |


Technical data ETIM 7.0

|                                                                                                                                                                                                            |  |  |                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|-------------------------|
| Low-voltage industrial components (EG000017) / Connection module for signal tower (EC001152)                                                                                                               |  |  |                         |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Signal column element, connection module (ec1@ss10.0.1-27-37-12-32 [AKF050014]) |  |  |                         |
| Connection type auxiliary circuit                                                                                                                                                                          |  |  | Spring clamp connection |
| Tube mounting possible                                                                                                                                                                                     |  |  | No                      |
| Bracket mounting possible                                                                                                                                                                                  |  |  | Yes                     |
| Floor mounting possible                                                                                                                                                                                    |  |  | Yes                     |
| Colour                                                                                                                                                                                                     |  |  | Other                   |
| Suitable for AS interface                                                                                                                                                                                  |  |  | No                      |

Approvals

|                             |  |  |                                                                                |
|-----------------------------|--|--|--------------------------------------------------------------------------------|
| Product Standards           |  |  | IEC/EN 60947-5-1; UL 508; CSA-C22.2 No. 14-10; CSA-C22.2 No. 94-91; CE marking |
| UL File No.                 |  |  | E29184                                                                         |
| UL Category Control No.     |  |  | NKCR                                                                           |
| CSA File No.                |  |  | UL report applies to both US and Canada                                        |
| CSA Class No.               |  |  | NKCR7                                                                          |
| North America Certification |  |  | UL listed, certified by UL for use in Canada                                   |
| Degree of Protection        |  |  | UL Type 4, 4X, 13                                                              |

Dimensions

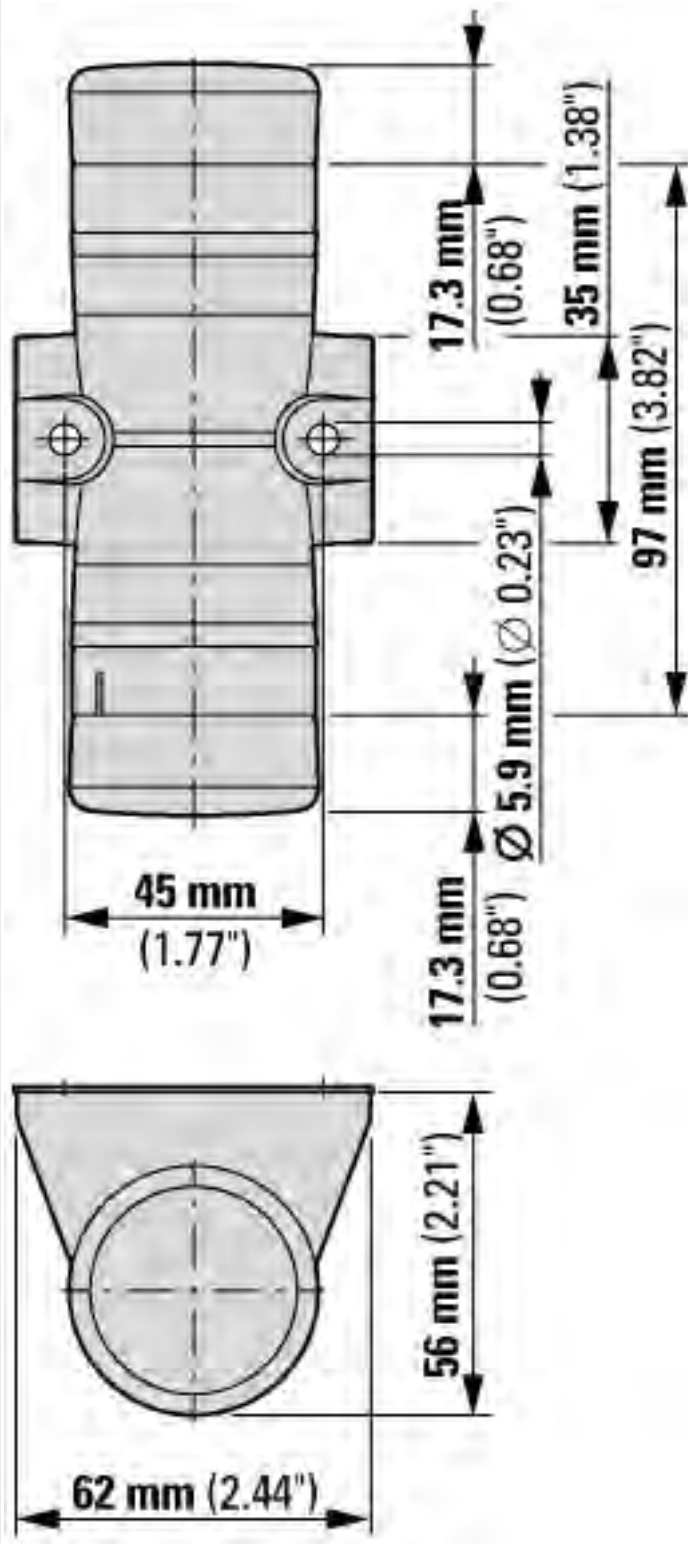

Assets (links)

- [Declaration of CE Conformity](#)  
00002899
- [Instruction Leaflets](#)  
IL047001ZU2018\_05

Additional product information (links)

|                                                |  |
|------------------------------------------------|--|
| IL047001ZU Signal Towers SL4: Main instruction |  |
| IL047001ZU Signal Towers SL4: Main instruction |  |
| IL047002ZU Signal Towers SL4: Drill pattern    |  |
| IL047002ZU Signal Towers SL4: Drill pattern    |  |

