




Bell transformer 4VA 230/8-12V

ST301

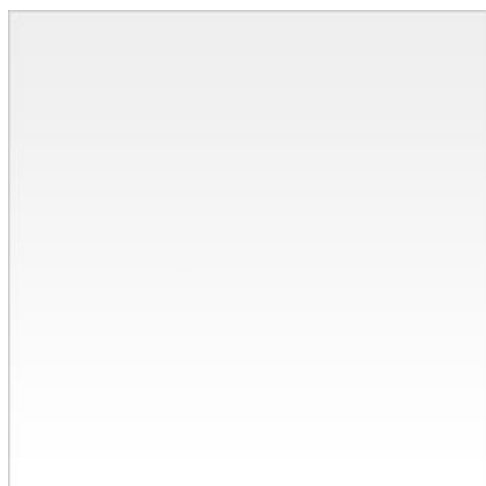

Main electrical features

Frequency	50 Hz
Rated operational voltage U_e	230 V

Voltage

Rated insulation voltage	4000 V
Output voltage	8/12 V
Output voltage 2	12 V

Electric current

Output intensity	0,5 A
Output intensity 2	0,33 A

Power

Power	4 VA
Power consumed	4 VA
Power absorbed	4 W
Total power loss under IN	1,8 W

Power supply

Transformer	Standard bell ringing transformer
-------------	-----------------------------------

Dimensions

Depth of installed product	65 mm
Height of installed product	111 mm
Length	64 mm
Width of installed product	35 mm

Installation, mounting

Suitable for flush-mounting	no
Suitable for surface mounting	yes

Connection

Connection cross-sect. rigid cable	6mm ²
Connection cross-sect. flexible cable	4mm ²

Equipment

Short-circuit protected	yes
-------------------------	-----

Safety

Protection index IP	IP20
Temperature protection	yes