

## SOLAR INVERTERS

## ABB string inverters

PVI-3.0/3.6/4.2-TL-OUTD

3.6 to 4.2 kW



01

—  
01  
PVI-3.0/3.6/4.2-TL-OUTD  
outdoor string inverter

The dual input section processes two strings with independent Maximum Power Point Tracking (MPPT). This is particularly useful for rooftop installations with two different orientations (e.g. East and West). The high speed MPPT offers real-time power tracking and improved energy harvesting.

### Efficiency of up to 96.8%

The transformerless (TL) operation gives the highest efficiency of up to 96.8%. The wide input voltage range makes the inverter suitable for low power installations with reduced string size.

This rugged outdoor inverter has been designed as a completely sealed unit to withstand the harshest environmental conditions.

Our most common residential inverter is the ideal size for an average-sized family home.

ABB's UNO family of single-phase string inverters complements the typical number of rooftop solar panels, allowing home owners to get the most efficient energy harvesting for the size of the property.

### Highlights

- Single-phase output
- Transformerless topology
- Each inverter is set on specific grid codes which can be selected in the field
- Wide input voltage range
- High speed and precise MPPT algorithm for real time power tracking and improved energy harvesting
- Dual input section with independent MPPT, allows optimal energy harvesting from two sub-arrays
- Flat efficiency curves ensure high efficiency at all output levels ensuring consistent and stable performance across the entire input voltage and output power range
- Integrated DC disconnect switch in compliance with international standards (-S version)
- Natural convection cooling for maximum reliability
- Outdoor enclosure for unrestricted use under any environmental conditions
- RS-485 communication interface (for connection to laptop or datalogger)

# ABB string inverters

PVI-3.0/3.6/4.2-TL-OUTD


3.6 to 4.2 kW



## Technical data and types

Type code	PVI-3.0-TL-OUTD	PVI-3.6-TL-OUTD	PVI-4.2-TL-OUTD
<b>Input side</b>			
Absolute maximum DC input voltage ( $V_{max,abs}$ )	600 V		
Start-up DC input voltage ( $V_{start}$ )	200 V (adj. 120...350 V)		
Operating DC input voltage range ( $V_{dcmin}...V_{dcmax}$ )	0.7 x $V_{start}...580$ V (min 90 V)		
Rated DC input voltage ( $V_{dc}$ )	360 V		
Rated DC input power ( $P_{dc}$ )	3120 W	3750 W	4375 W
Number of independent MPPT	2		
Maximum DC input power for each MPPT ( $P_{MPPTmax}$ )	2000 W	3000 W	3000 W
DC input voltage range with parallel configuration of MPPT at $P_{acr}$	160...530 V	120...530 V	140...530 V
DC power limitation with parallel configuration of MPPT	Linear derating from max to null [530 V $\leq V_{MPPT} \leq$ 580 V]		
DC power limitation for each MPPT with independent configuration of MPPT at $P_{acr}$ , max unbalance example	2000 W [200 V $\leq V_{MPPT} \leq$ 530 V] the other channel: $P_{dcr}$ -2000 W [112 V $\leq V_{MPPT} \leq$ 530 V]	3000 W [190 V $\leq V_{MPPT} \leq$ 530 V] the other channel: $P_{dcr}$ -3000 W [90 V $\leq V_{MPPT} \leq$ 530 V]	
Maximum DC input current ( $I_{dcmax}$ ) / for each MPPT ( $I_{MPPTmax}$ )	20.0 A / 10.0 A		32.0 A / 16.0 A
Maximum input short circuit current for each MPPT	12.5 A		20.0 A
Number of DC input pairs for each MPPT	1	1	1
DC connection type	PV quick fit connector <sup>3)</sup>		
<b>Input protection</b>			
Reverse polarity protection	Yes, from limited current source		
Input over voltage protection for each MPPT - varistor	Yes		
Photovoltaic array isolation control	According to local standard		
DC switch rating for each MPPT (version with DC switch)	25 A / 600 V		
<b>Output side</b>			
AC grid connection type	Single-phase		
Rated AC power ( $P_{acr}$ @ $\cos\phi=1$ )	3000 W	3600 W	4200 W
Rated AC power ( $P_{acr}$ @ $\cos\phi=\pm 0.9$ )	3000 W	3600 W	4200 W
Maximum AC output power ( $P_{acmax}$ @ $\cos\phi=1$ )	3300 W <sup>5)</sup>	4000 W <sup>6)</sup>	4600 W <sup>7)</sup>
Maximum apparent power ( $S_{max}$ )	3330 VA	4000 VA	4670 VA
Rated AC grid voltage ( $V_{ac,r}$ )	230 V		
AC voltage range	180...264 V <sup>1)</sup>		
Maximum AC output current ( $I_{ac,max}$ )	14.5 A	17.2 A <sup>2)</sup>	20.0 A
Contributory fault current	16.0 A	19.0 A	22.0 A
Rated output frequency ( $f_i$ )	50 Hz / 60 Hz		
Output frequency range ( $f_{min}...f_{max}$ )	47...53 Hz / 57...63 Hz <sup>4)</sup>		
Nominal power factor and adjustable range	> 0.995, adj. 0.8 inductive to 0.8 capacitive		
Total current harmonic distortion	< 3.5%		
AC connection type	Screw terminal block, cable gland M25		
<b>Output protection</b>			
Anti-islanding protection	According to local standard		
Maximum external AC overcurrent protection	20.0 A	25.0 A	25.0 A
Output overvoltage protection - varistor	2 (L - N / L - PE)		
<b>Operating performance</b>			
Maximum efficiency ( $\eta_{max}$ )	96.8%		
Weighted efficiency (EURO/CEC)	96.0% / -		
Feed in power threshold	10.0 W		
Night consumption	< 0.4 W		

## ABB PVI-3.0/3.6/4.2-TL-OUTD string inverter block diagram

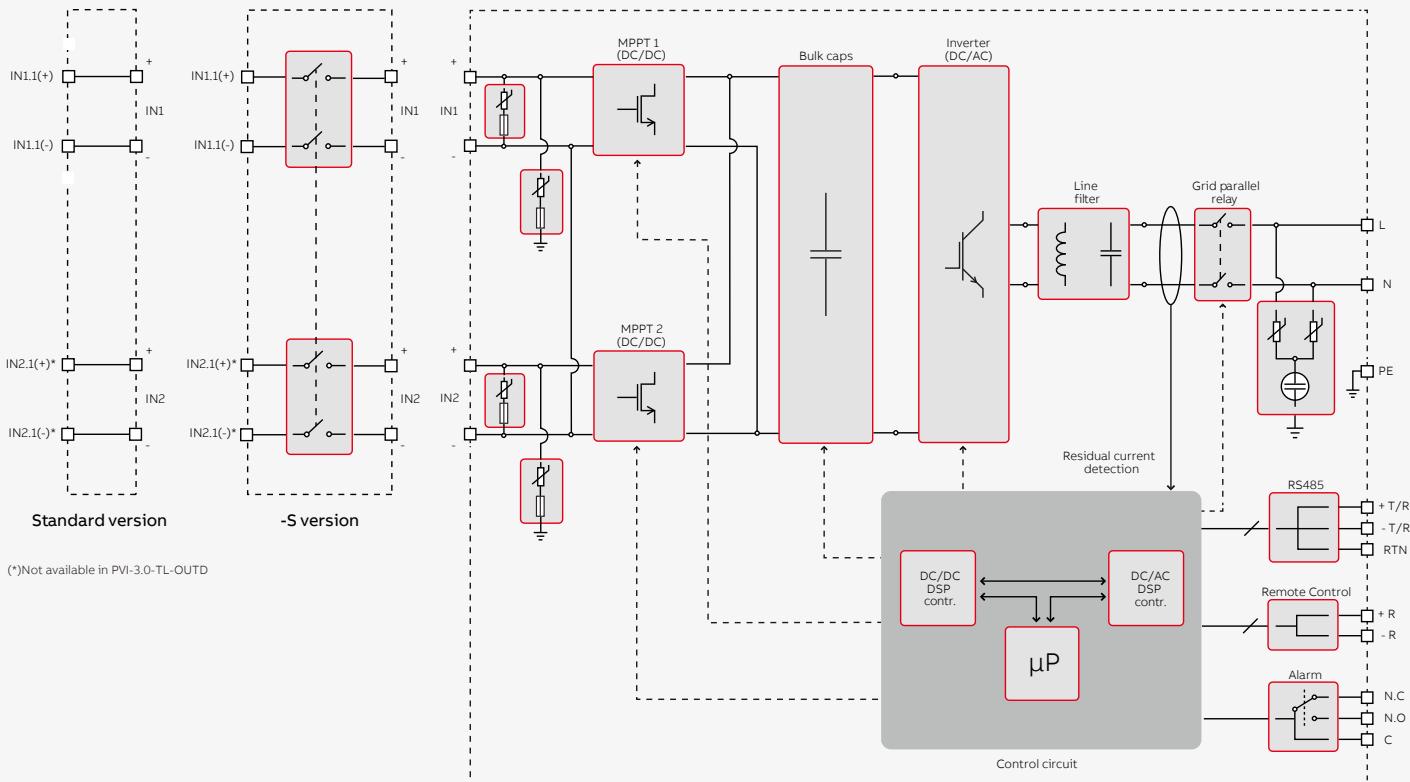

## Technical data and types

Type code	PVI-3.0-TL-OUTD	PVI-3.6-TL-OUTD	PVI-4.2-TL-OUTD
<b>Communication</b>			
Wired local monitoring	PVI-USB-RS232_485 (opt.)		
Remote monitoring	VSN300 Wifi Logger Card (opt.), VSN700 Data Logger (opt.)		
Wireless local monitoring	VSN300 Wifi Logger Card (opt.)		
User interface	16 characters x 2 lines LCD display		
<b>Environmental</b>			
Ambient temperature range	-25...+60°C / -13...140°F with derating above 50°C/122°F	-25...+60°C / -13...140°F with derating above 55°C/131°F	-25...+60°C / -13...140°F with derating above 50°C/122°F
Relative humidity	0...100% condensing		
Sound pressure level, typical	50 dBA @ 1 m		
Maximum operating altitude without derating	2000 m / 6560 ft		
<b>Physical</b>			
Environmental protection rating	IP65		
Cooling	Natural		
Dimension (H x W x D)	618 mm x 325 mm x 222 mm / 24.3" x 12.8" x 8.7"		
Weight	17.5 kg / 38.5 lbs		
Mounting system	Wall bracket		
<b>Safety</b>			
Isolation level	Transformerless		
Marking	CE (50 Hz only), RCM		
Safety and EMC standard	EN 50178, IEC/EN 62109-1, IEC/EN 62109-2, AS/NZS 3100, EN 61000-6-1, EN 61000-6-3, EN 61000-3-11, EN 61000-3-12		
Grid standard (check your sales channel for availability)	CEI 0-21, DIN V VDE V 0126-1-1, VDE-AR-N 4105, G83/2, G59/3, EN 50438 (not for all national appendices), RD 1699, RD 413, ITC-BT-40, AS 4777, IEC 61727, IEC 62116		
<b>Available products variants</b>			
Standard	PVI-3.0-TL-OUTD	PVI-3.6-TL-OUTD	PVI-4.2-TL-OUTD
With DC switch	PVI-3.0-TL-OUTD-S	PVI-3.6-TL-OUTD-S	PVI-4.2-TL-OUTD-S

① The AC voltage range may vary depending on specific country grid standard

② For UK G83/2 setting, maximum output current limited to 16A up to a maximum output power of 3.68 kW

③ Please refer to the document "String inverters – Product manual appendix" available at [www.abb.com/solarinverters](http://www.abb.com/solarinverters) for information on the quick-fit connector brand and model used in the inverter


④ The Frequency range may vary depending on specific country grid standard

⑤ Limited to 3000 W for Germany

⑥ Limited to 3600 W for Germany

⑦ Limited to 4200 W for Germany

Remark. Features not specifically listed in the present data sheet are not included in the product

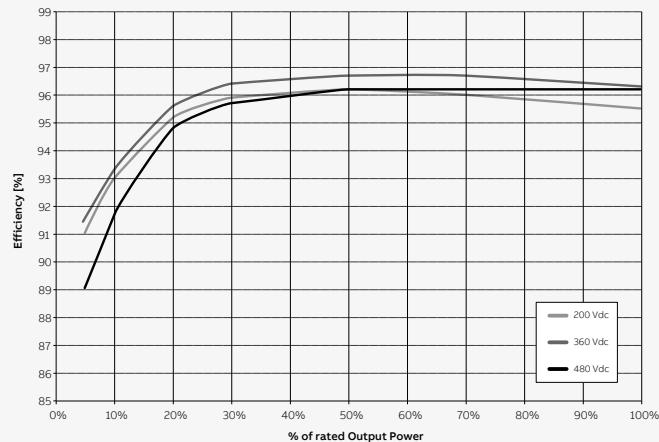**Efficiency curves of PVI-3.0-TL-OUTD****Efficiency curves of PVI-4.2-TL-OUTD**