

## Modular Hour Meter for DIN-Rail Mounting



BZ326418-A


### Schrack-Info

- With screw terminals for DIN-rail mounting
- Durable, maintenance-free technology
- Space-saving - only 2 MW wide
- Applications: Operating hour control in machines and pumps

### Technical Data

Rated voltage	230 V, 50 - 60 Hz
Tolerance of voltage	±15%
Power consumption	0,26 W
Counting capacity	99.999 hour
Accuracy	0,01 hour
Digit-size	4,4 mm
Digit colour	white, decimal red
Tap-change in progress indicator (without zero position)	LED flashing
Ambient temperature	-15°...+55°C
Cover	self-extinguishing thermoplastic
Connection	screw-terminals
Protection class	IP 50 according EN 60529
Insulation class	II

### Dimensions

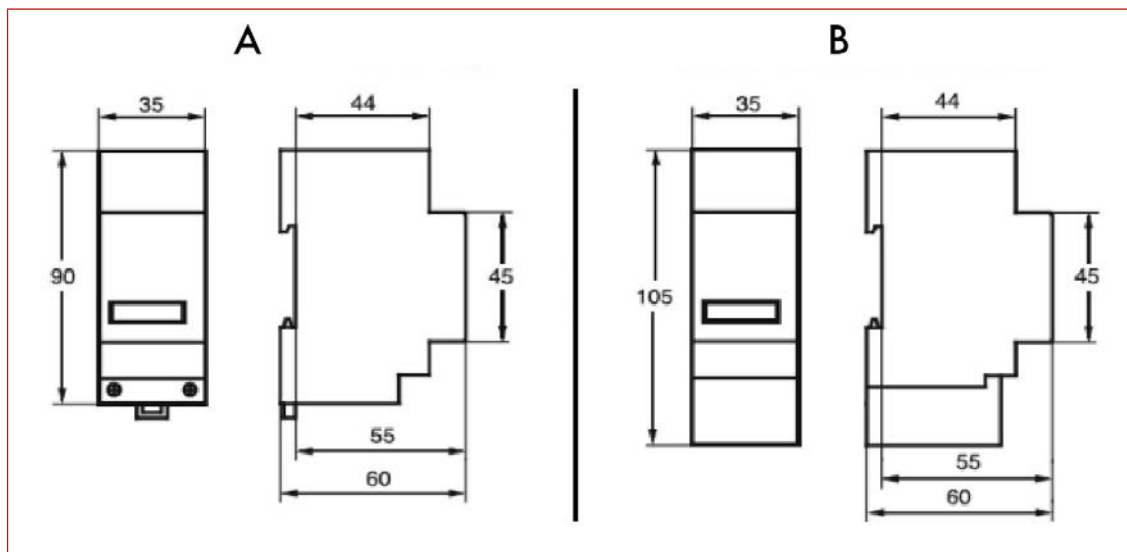

### Key

<b>A</b>	without terminal-cover
<b>B</b>	with terminal-cover

DESCRIPTION	AVAILABLE	ORDER NO.
230V AC		<b>BZ326418-A</b>
24V AC		<b>BZ326423-A</b>

