

483 mm (19") Wall Mounting Cabinet SoHo Series, unmounted



- ✓ Safety class IP20
- ✓ unmounted flat-pack version
- ✓ various front door versions available
- ✓ various depth versions available

Abstract

483 mm (19") Wall Mounting Cabinet SoHo Series, unmounted, 540 mm width - 300 mm, 400 mm, 600 mm depth

Features

- Safety class rating IP20
- Lockable front door
- 200° door opening angle
- 1-point-locking-mechanism on the front door
- 483 mm (19") profile rails mounted on the front side inside of the cabinet, galvanized
- 483 mm (19") profile rails are adjustable in depth
- Load capacity of 483 mm (19") profile rails: 60 kg
- 1.1 - 1.5 strong sheet steel with a high loading capacity, powder coated
- Cable entry with brush strip on the top and with plastic cover on the base
- Roof is prepared for fan units (punched out entries)
- Ventilation slots for active and passive ventilation and exhausting

Produktübersicht

The unmounted SoHo Wall Mounting Cabinets are made of a robust sheet steel construction with a minimum of seams. The enclosures are special designed to save a lot of space and costs while delivery due to the flat packaging. It is fast and easy to mount the cabinet. Due to their flexibility the cabinets are ideal for all current IT and telecommunication applications.

Product Number Information

540x300 mm (WxD)

Item code*	Front door	Height unit (U)	HxWxD in mm	Color
DN-19-07U-S-300	Glass door	7U	370x540x300 mm	Grey (RAL 7035)
DN-19-07U-S-300-SW				Black (RAL 9005)
DN-19-07U-S-300-SD	Steel door			Grey (RAL 7035)
DN-19-07U-S-300-SDSW				Black (RAL 9005)
DN-19-07U-S-300-PD	Perforated			Grey (RAL 7035)
DN-19-07U-S-300-PDSW				Black (RAL 9005)

* 300 mm depth is available only as 7U version

540x400 mm (WxD)

Item code	Front door	Height unit (U)	HxWxD in mm	Color
DN-19 07U-S-1	Glass door	7U	370x540x400 mm	Grey (RAL 7035)
DN-19 07-U-S-SW				Black (RAL 9005)
DN-19 09-U-S-1		9U	460x540x400 mm	Grey (RAL 7035)
DN-19 09-U-S-SW				Black (RAL 9005)
DN-19 12-U-S-1		12U	595x540x400 mm	Grey (RAL 7035)
DN-19 12-U-S-SW				Black (RAL 9005)
DN-19-07U-S-SD	Steel door	7U	370x540x400 mm	Grey (RAL 7035)
DN-19-07U-S-SD-SW				Black (RAL 9005)
DN-19-09U-S-SD		9U	460x540x400 mm	Grey (RAL 7035)
DN-19-09U-S-SD-SW				Black (RAL 9005)
DN-19-12U-S-SD		12U	595x540x400 mm	Grey (RAL 7035)
DN-19-12U-S-SD-SW				Black (RAL 9005)
DN-19-07U-S-PD	Perforated	7U	370x540x400 mm	Grey (RAL 7035)
DN-19-07U-S-PD-SW				Black (RAL 9005)
DN-19-09U-S-PD		9U	460x540x400 mm	Grey (RAL 7035)
DN-19-09U-S-PD-SW				Black (RAL 9005)
DN-19-12U-S-PD		12U	595x540x400 mm	Grey (RAL 7035)
DN-19-12U-S-PD-SW				Black (RAL 9005)

540x600 mm (WxD)

Item code	Front door	Height unit (U)	HxWxD in mm	Color
DN-19-07U-S-600	Glass door	7U	370x540x600 mm	Grey (RAL 7035)
DN-19-07U-S-600-SW				Black (RAL 9005)
DN-19-09U-S-600		9U	460x540x600 mm	Grey (RAL 7035)
DN-19-09U-S-600-SW				Black (RAL 9005)
DN-19-12U-S-600		12U	595x540x600 mm	Grey (RAL 7035)
DN-19-12U-S-600-SW				Black (RAL 9005)
DN-19-07U-S-600-SD	Steel door	7U	370x540x600 mm	Grey (RAL 7035)
DN-19-07U-S-600-SDSW				Black (RAL 9005)
DN-19-09U-S-600-SD		9U	460x540x600 mm	Grey (RAL 7035)
DN-19-09U-S-600-SDSW				Black (RAL 9005)
DN-19-12U-S-600-SD		12U	595x540x600 mm	Grey (RAL 7035)
DN-19-12U-S-600-SDSW				Black (RAL 9005)
DN-19-07U-S-600-PD	Perforated	7U	370x540x600 mm	Grey (RAL 7035)
DN-19-07U-S-600-PDSW				Black (RAL 9005)
DN-19-09U-S-600-PD		9U	460x540x600 mm	Grey (RAL 7035)
DN-19-09U-S-600-PDSW				Black (RAL 9005)
DN-19-12U-S-600-PD		12U	595x540x600 mm	Grey (RAL 7035)
DN-19-12U-S-600-PDSW				Black (RAL 9005)

Product Images


DN-19-07U-S-600-SD




DN-19-07U-S-600-PD




Technical Drawings




BOTTOM VIEW




TOP VIEW

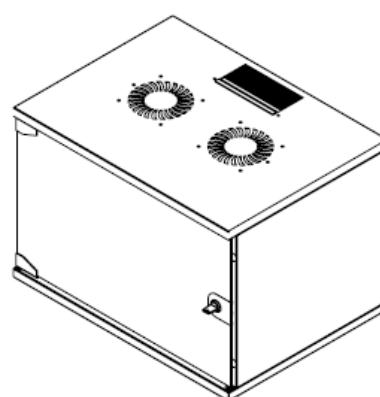


ISOMETRIC VIEW

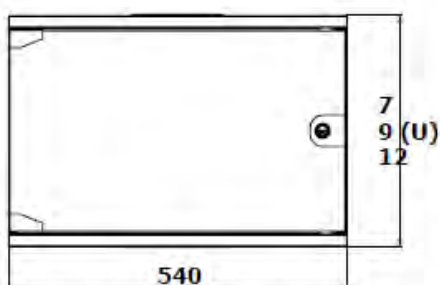

FRONT VIEW




SIDE VIEW

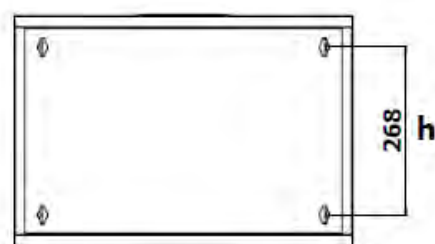


REAR VIEW

D=300

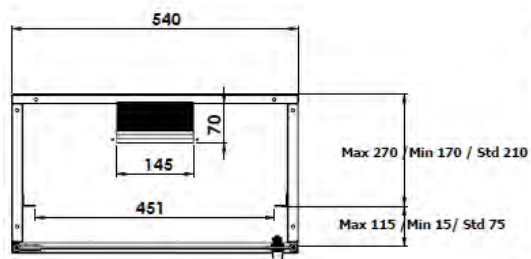

D=400

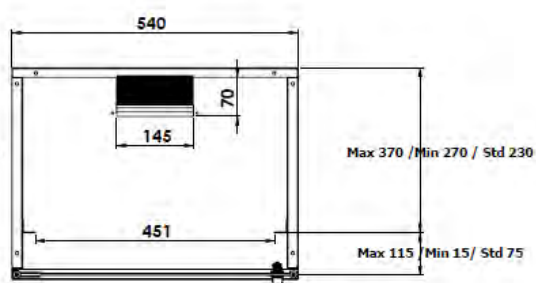

D=600

