



OUTLET SOCKET

HW 040

HW 040

Outlet socket


40 mm

Article number: 92404001

Cavity wall outlet socket, flame resistant, for lighting outlets acc. to VDE 0100, for plate thicknesses from 1 to 30 mm, screwing distance 27 mm, including white sealing cap

Drilled hole Ø 35 mm, 40 mm deep

IP30

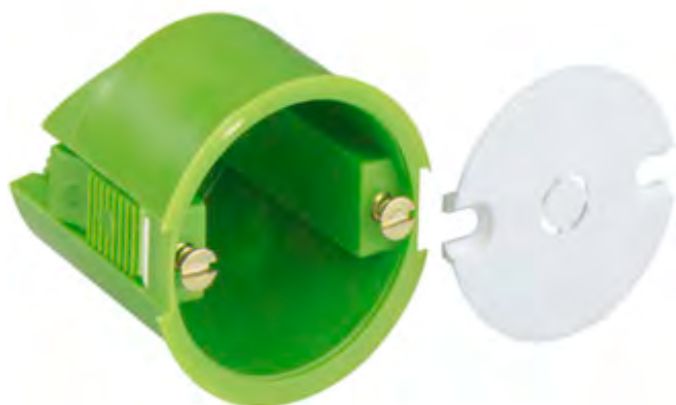

Technical data

Measures

Height:	40 mm
---------	-------

Material:

Material::	polypropylene, flame-retardant
------------	-----------------------------------

Other attributes

Heavy metals-free:	Yes
PVC-free:	Yes
Silicone-free:	Yes
Ingress protection:	IP30 - acc. EN 60529 / DIN VDE 0470-1

Accessory

ES-10 - Installation screw

ES-18 - Installation screw

ES-25 - Installation screw

Environmental attributes

Ambient temperature (min.):	-25 °C
Ambient temperature (max.):	40 °C
Ambient temperature (24 h):	35 °C
Max. rel. humidity at 40° C:	50%
Max. rel. humidity at 25° C (short term):	-