

## Combination arrester upper part 280 V




V 25-B+C/0...: CombiController, upper part – Type 1+2 CombiArrester




- Plug-in upper part; upper part can be separated from base without tools and current cut-off in bottom part
- Including thermal and dynamic separating device and visual fault display
- High current conductivity and long service life

Type	Highest continuous voltage V	U max DC voltage V	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
V25-B+C 0-280	280	350	1-pole	1	9,500	5097053

### Dimensions

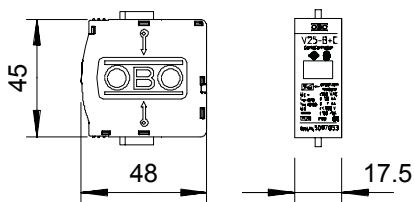

### Connection options



#### V25-B+C 0-280

Nominal voltage V	U <sub>N</sub>	230
SPD to EN 61643-11		Type 1+2
SPD to IEC 61643-11		Class I+II
Lightning protection zone LPZ		0-2
Impulse discharge current (10/350) kA	I <sub>imp</sub>	7
Total discharge current (10/350) kA	I <sub>total</sub>	7
Nominal discharge current (8/20) kA	I <sub>n</sub>	30
Arrester surge current (8/20) [total] kA	I <sub>total 8/20</sub>	30
Maximum discharge current (8/20 μs) kA	I <sub>max</sub>	50
		–
Voltage protection level kV	U <sub>p</sub>	< 0,9
Response time ns	t <sub>A</sub>	< 25
Maximum back-up fuse A		160
Temperature range °C	θ	-40+80
Division unit TE (17.5 mm)		1
Protection rating		IP20