


### Lightning current arrester, 1-pole NPE



MC 125-B/NPE: For use in TN-S and TT systems as N-PE discharge gap, type 1 (Class B) IEC 61643, for interface 0 to 1 (LPZ) according to lightning protection zone concept to IEC 61312-1 and/or DIN V VDE V 0185 Part 4 for use as discharge gap between N and PE.

- VDE test mark
- Conforms to VDN Directive, 2nd Edition 2004
- Protection capability 125 kA 10/350  $\mu$ s
- Including plug caps for identifying the connections
- Protection level <2.5 kV
- Enclosed, non-extinguishing discharge gap: can be used in normal commercial distributor housings

#### Dimensions

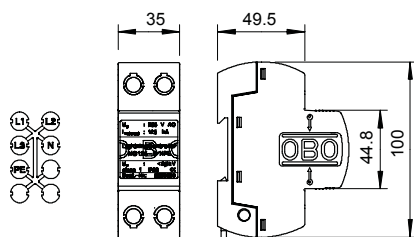


Application example: lightning arrester in accordance with VDN Directive for pre-meter area.

Note: required as de-coupling length for overvoltage protection of 5 m of cable.

Type	Highest continuous voltage V	Pack. pcs	Weight kg/100 pcs	Item No.
MC 125-B NPE	255   NPE	1	52,000	5096863

#### Connection options



#### MC 125-B NPE

Nominal voltage V	$U_N$	230
SPD to EN 61643-11		Type 1
SPD to IEC 61643-11		Class I
Lightning protection zone LPZ		0→1
Impulse discharge current (10/350) kA	$I_{imp}$	50
Total discharge current (10/350) kA	$I_{total}$	125
Nominal discharge current (8/20) kA	$I_n$	50
Arrester surge current (8/20) [total] kA	$I_{total 8/20}$	125
Voltage protection level kV	$U_p$	< 2,5
Response time ns	$t_A$	< 100
Follow current quenching capacity (eff) [N-PE] kA	$I_{fi}$	0,1
Maximum back-up fuse A		—
Temperature range °C	$\vartheta$	-40+85
Division unit TE (17.5 mm)		2
Protection rating		IP20
Connection cross-section rigid mm <sup>2</sup>		10-50
Connection cross-section, multi-wire mm <sup>2</sup>		10-35
Connection cross-section, flexible mm <sup>2</sup>		10-25