


# AD 275

Doosan  
Mecc Alte  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$%



2000/14/EC

&\$\$\$#( #

z) \$' z'z' D:

	"	"	"	"	Amp
400/230	275,00	220,00	250,00	200,00	360,00

fP GDE

GC, ) &

,) & z

fDF DE

%\$1

% %&

GC " \$(\*\*

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

D: A Z 5J F

## TRANSFER SWITCH

# AD 275

Doosan  
Mecc Alte  
D+' &'

Manufacturer	Doosan		
Model	P126TI		
		% \$\$\$' "# "	
		&+&\$\$\$' "	
		0* ( \$\$\$< DQ	
	L	11,050	
	"	123 x 155	
		17,0:1	
	fl # ı	"# "	1500
	fl ı	L	23,00
		L	65,00
AbsorbedAirDischargeReSourceKey.Text	' # "	16,40	
	' # "	295,00	
fl ' # ı	' # "	43,00	
	° C	560,00	
		24 V d.c.	
	Load	%\$\$ı	'+)ı
	# "	)\$ı	
		53,30	40,00 27,50


	Mecc Alte		
	ECO 38-1LN		
	Hz	50	
	"	250,00	
7cg'		0,80	
		3	
	fl ı	400/230	
	A	360,00	
Temperature		H	

		fl ı		fl ı	
	"	"	"	"	L
AD 275	2265,00	2950,00	1300,00	1588,00	450,00
		fl ı		fl ı	
	"	"	"	"	L
MS 60	2940	4000	1300	1970	450

# AD 275

Doosan  
Mecc Alte  
D+' &'

## 1 D+' &'

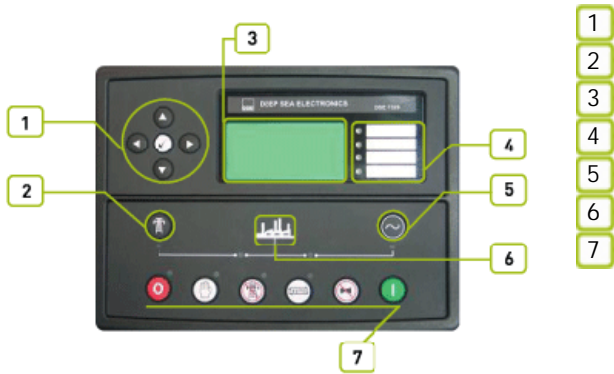

## 2

"8G9ž + ' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

'8G9+' &\$' fi  
&&\$' ž

"'8G9+' &\$'  
'8G9+' &\$'

ž


% &1 \*('

žFG&' &žFG(, ) ž

ž


AD 275

Doosan Mecc Alte D+ & "

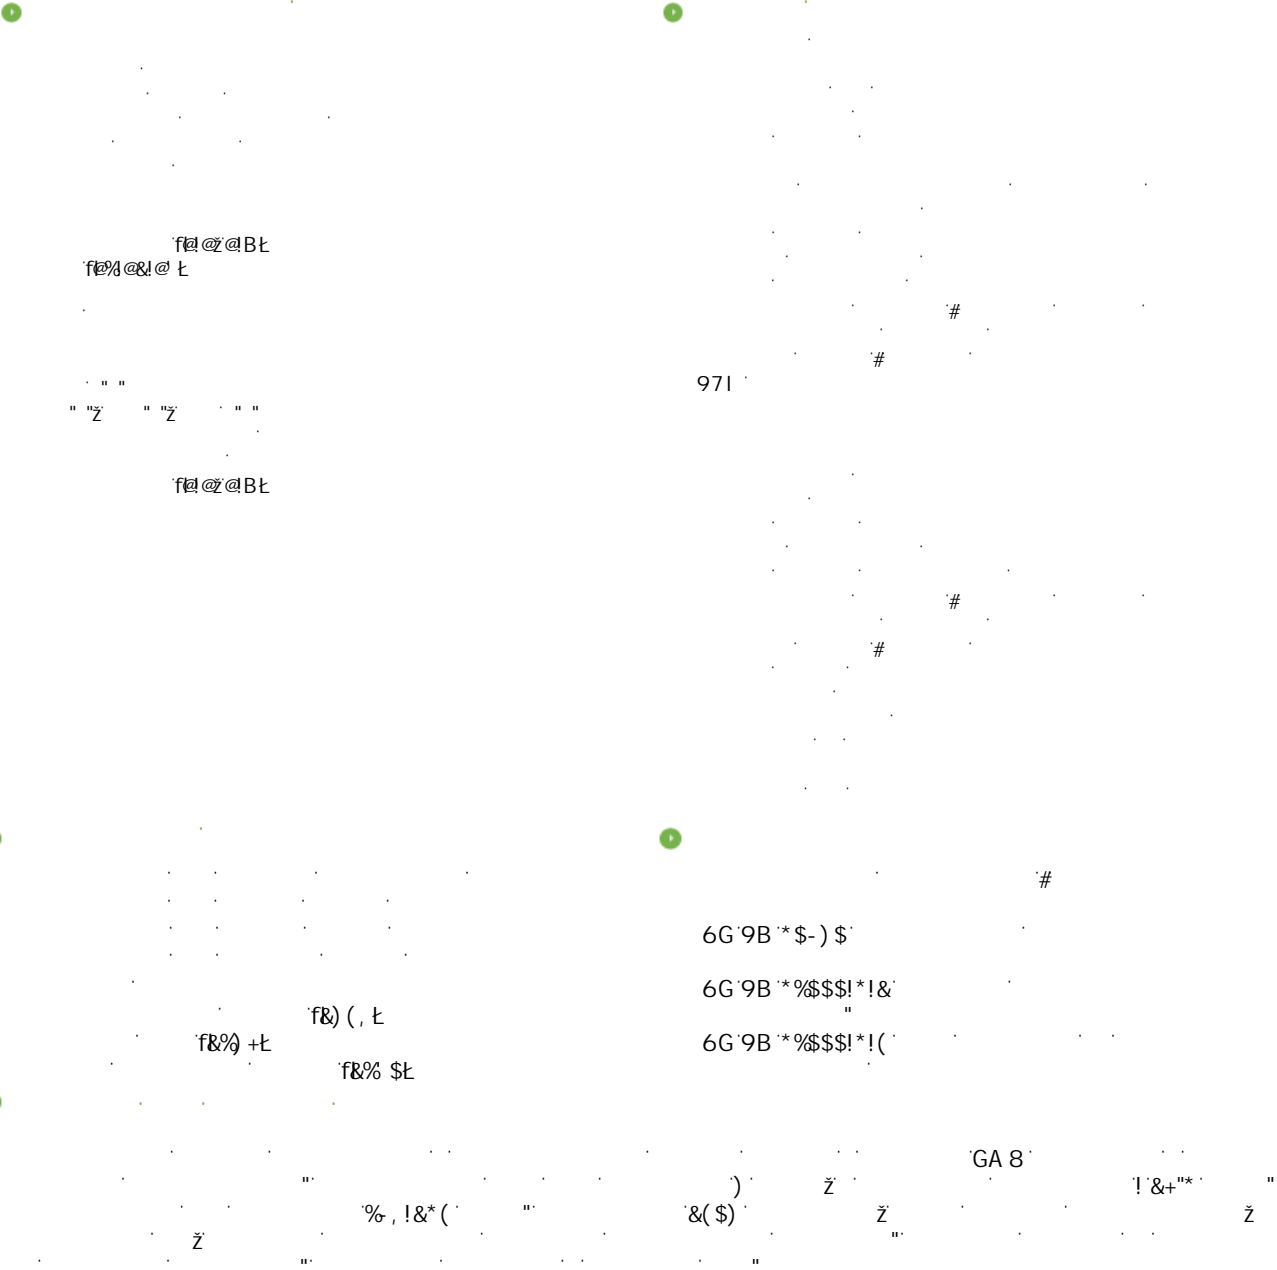

# AD 275

Doosan  
Mecc Alte  
D+ &

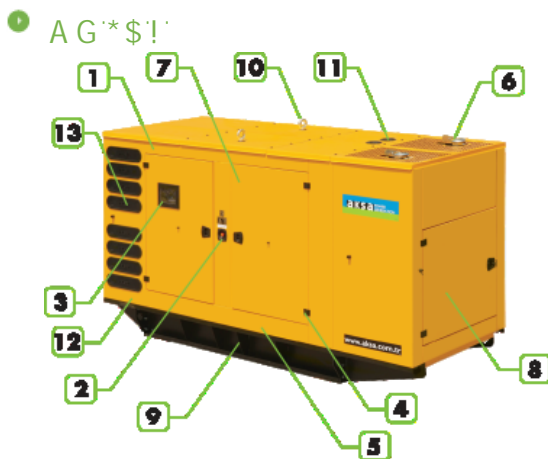

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1300
fl "L	"	4000
fl "L	"	1970
	L	450