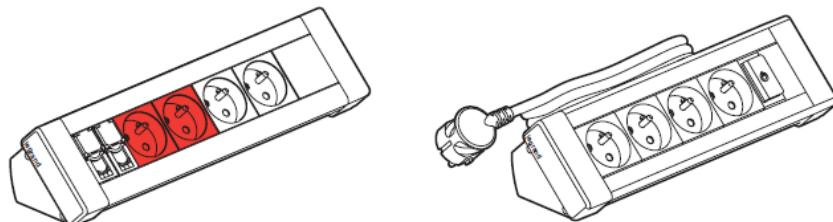


## Desktop multi-outlets new design

Number(s) :  
0 535 98- 0 546 00/01/15/16/20/21/25/26/27/28/29/31/33/35/36/37/  
90/91/92/99 - 6 535 60 à 63



| CONTENTS                    | PAGES  |
|-----------------------------|--------|
| 1 Range                     | 1 to 2 |
| 2 On demand                 | 3      |
| 3 Technical characteristics | 3 to 5 |
| 4. Material characteristics | 5      |

### 1. RANGE

Desktop multi-outlets :

- an ideal solution dedicated to nomadic people and/or satisfy a aesthetic needs.
- products answering all needs (pre-wired, to wire, empty or on demand)
- a specific accessory allowing to fix the product on the desk
- a reliable and secure installation with conformity to NFC 61-314
- index of protection: IK07
- Finishes available :
  - . natural anodized aluminium
  - . wiring devices and plastic parts colour white RAL 9003







Packaging : 1

#### 1.1 Desktop multi-outlets

##### 1.1.1 Prewired

Supplied without cord

Connection on terminal blocks with cable grip











| Numbers  | Dimensions<br>LxHx (mm) | Functions                                                                           |
|----------|-------------------------|-------------------------------------------------------------------------------------|
| 0 546 00 | 280X90x80               |  |
| 0 546 01 | 370x90x80               |  |
| 0 546 15 | 280x90x80               |  |
| 0546 16  | 330x90x80               |  |
| 0546 20  | 330x90x80               |  |
| 0546 21  | 460x90x80               |  |

### 1. RANGE (continued)

#### 1.1.2 With cords




Supplied with cord

Connection on terminal blocks with cable grip

| Numbers                | Dimensions<br>LxHx (mm) | Functions                                                                             |
|------------------------|-------------------------|---------------------------------------------------------------------------------------|
| French std<br>0 546 25 | 280x90x80               |   |
| German std<br>6 535 60 |                         |  |
| French std<br>0 546 26 | 370x90x80               |  |
| German std<br>6 535 61 |                         |  |
| German std<br>6 535 63 | 330x90x80               |  |
| French std<br>0 546 27 | 280x90x80               |  |
| French std<br>0 546 28 | 370x90x80               |  |
| French std<br>0 546 29 | 370x90x80               |  |
| French std<br>0546 35  | 280x90x80               |  |
| German std<br>6 535 62 |                         |  |
| French std<br>0546 36  | 330x90x80               |  |
| French std<br>0546 33  | 330x90x80               |  |
| French std<br>0 546 31 | 280x90x80               |  |
| French std<br>0 546 37 | 370x90x80               |  |


## 1. RANGE (continued)

### 1.1.3 Empty to be equipped


| Numbers  | Dimensions<br>LxIxH (mm) | Functions                                                                         |
|----------|--------------------------|-----------------------------------------------------------------------------------|
| 0 546 90 | 240x90x80                |  |
| 0 546 91 | 330x90x80                |  |
| 0 546 92 | 420x90x80                |  |

## 1.2 Accessories


### 1.2.1 Fixing accessory Number 0 546 99



if L > to 400 mm use 2 x 0546 99

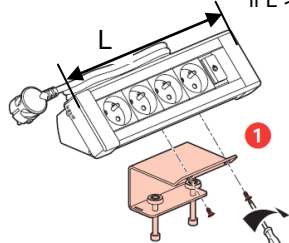

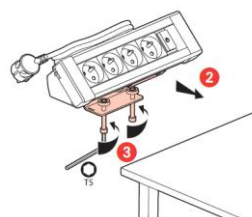Allow fixing on a desk from 6 to 40 mm of depth



The product includes adhesive protections for desk office surfaces.

Material characteristics of 0 546 99 :

- Steel (painted grey)
- Polyamide
- Elastomer

Packaging : 1

## 1. RANGE (continued)

### 1.2 Accessories

#### 1.2.2 Cable worm number 0 535 98



Very suitable solution for a safe and aesthetic protection of the cabling between desk and floor.

Packaging : 1

Length : 0.75m

Cabling capacity :

- minimum dimension of cable : 2x0,5 mm<sup>2</sup> (5mm diameter) 20 each side
- maximum dimension of cable: 5x2,5 mm<sup>2</sup> (14mm diameter) 3 each side

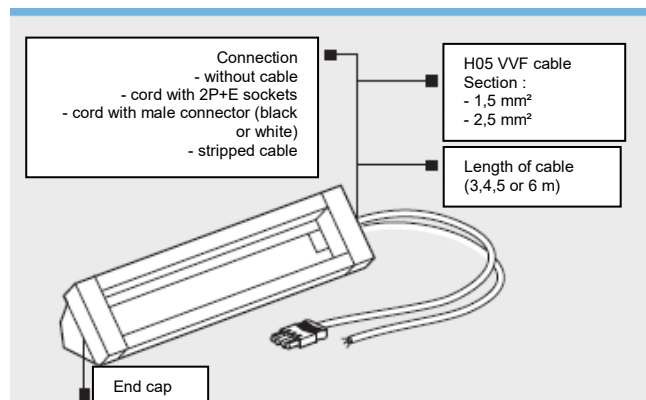
#### Material Characteristics of Nr. 0 535 98

Ring white colour : ABS + *thermoplastic polyurethane* ( for the membrane)

- Fixation accessory: ABS
- Base : plastic part = EPDM
- Metal plate = FE


## 2. ON DEMAND

Selection of desktop multi-outlet new design



The length of the unit varies depending on the quantity of functions needed.

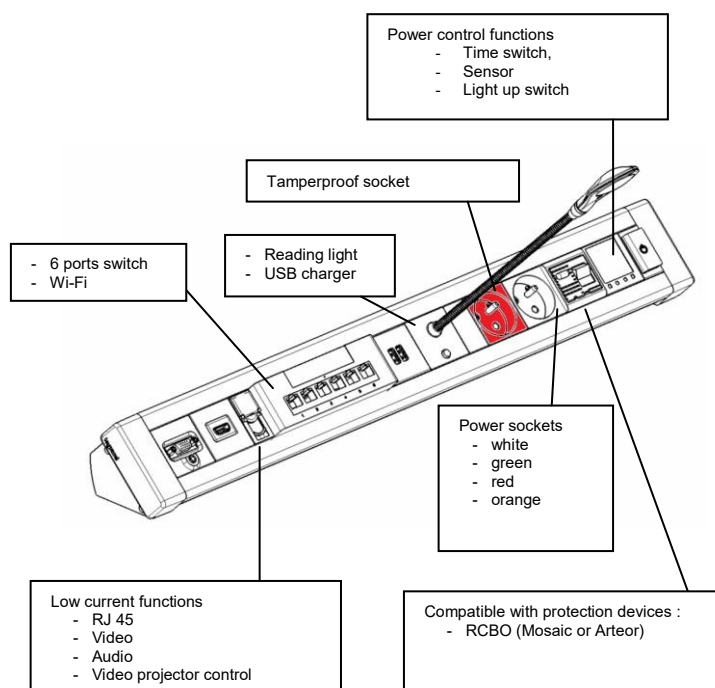Selection of functions





## 3. TECHNICAL CHARACTERISTICS (continued)

### 3.1 Connection


Use 3G1,5 mm² or 3G2,5 mm²
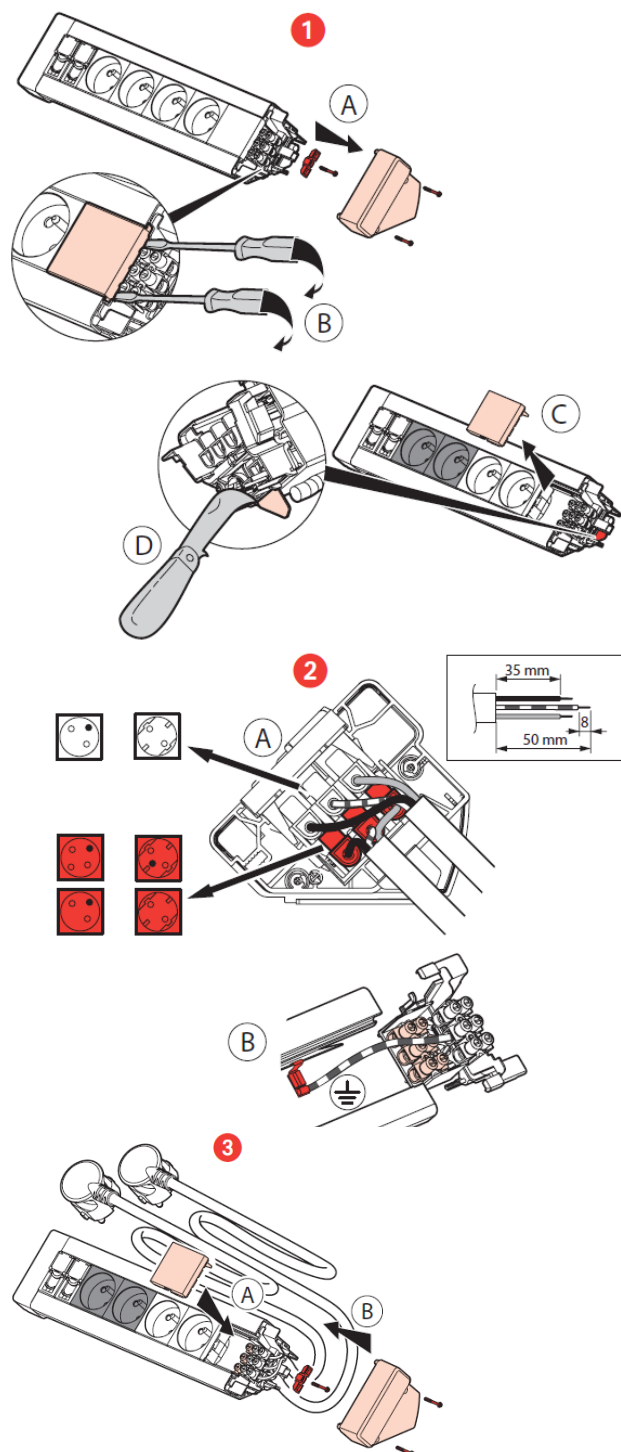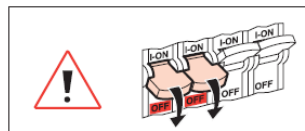
#### 3.1.1 With 2 power circuits and RJ45 plugs





## 3. TECHNICAL CHARACTERISTICS (continued)
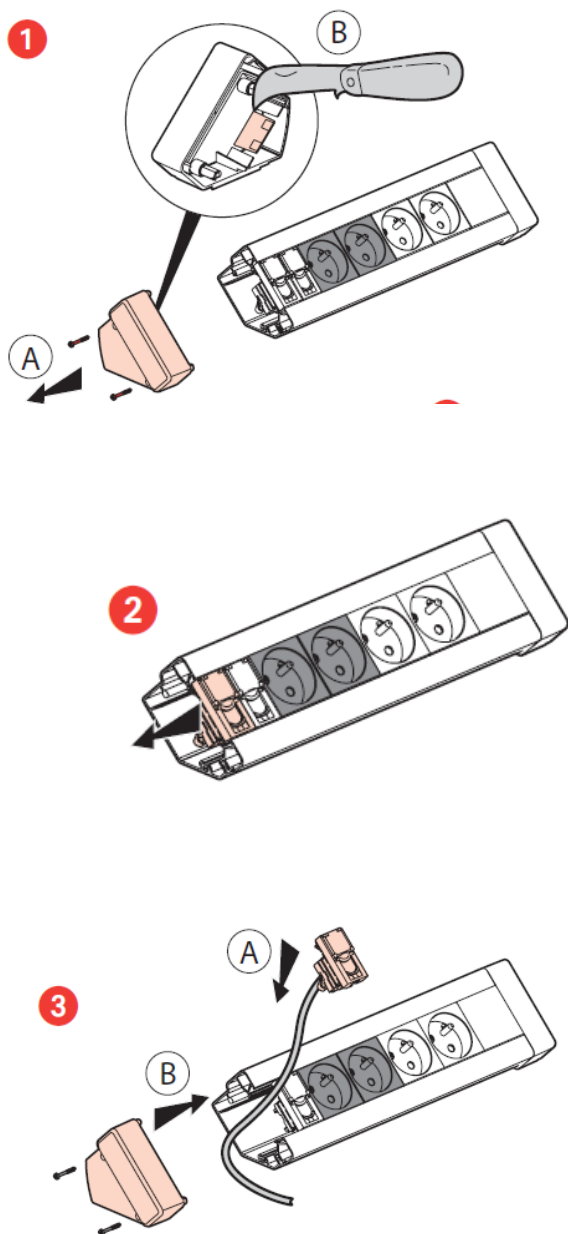
### 3.1.2 Connection of data sockets through the end cap



## 3. TECHNICAL CHARACTERISTICS (continued)
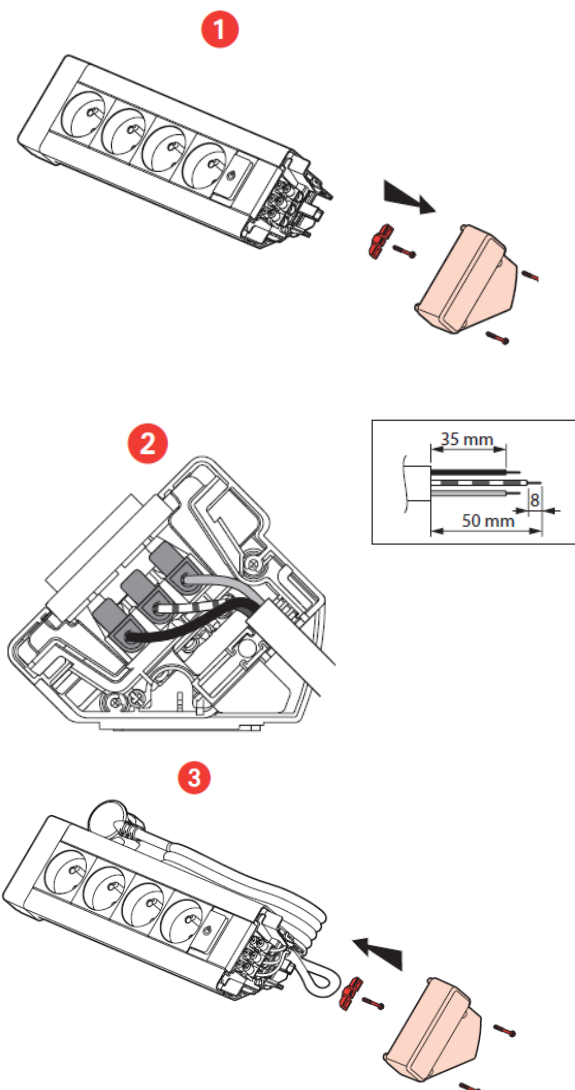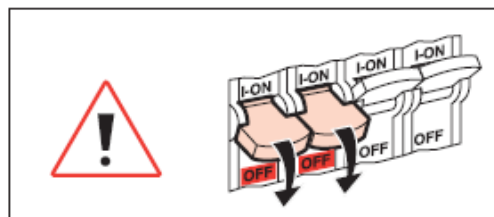
### 3.1.3 With 1 power circuit



### 3. TECHNICAL CHARACTERISTICS (continued)

Maximum power : 16A 3680W in 230V

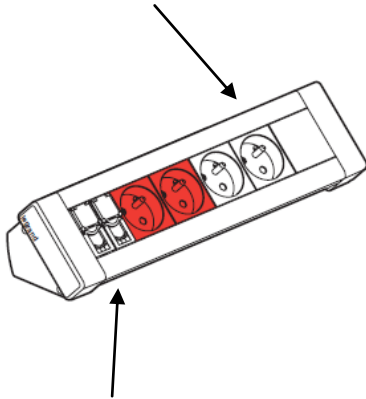
#### If delivered with cord :

Cable type : 3 meters HO5 VVF 3G 1.5 mm<sup>2</sup>

Plug type : 2P+T side outlet plug

Other plugs available on demand

Power on the right side (2 cables entries)



Data on the left side

#### If not delivered with cord :

Possibility to connect with :

HO5 VVF 3G 1.5 mm<sup>2</sup> or 3G 2.5 mm<sup>2</sup> (2 entries max)

### 4. MATERIAL CHARACTERISTICS

Standard product or on demand, natural anodized aluminium

End caps : white ABS

Cable grip : ABS

Terminal blocks : Polypropylene

Light switch : white PC